

CL62

CL62

In-ceiling loudspeaker


This ceiling loudspeaker, 6", two ways is a reference of quality in this range of products.

CL62 renders speech and background music with great fidelity. It is discrete, for a perfect integration in interior design. It is repaintable, and the logo can be removed.


CL62 has been designed to equip prestigious places.




Directivity pattern

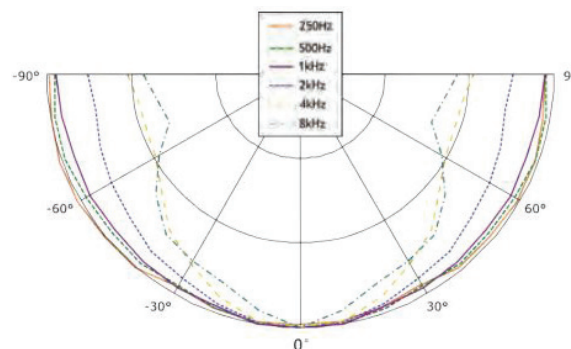

Impedance

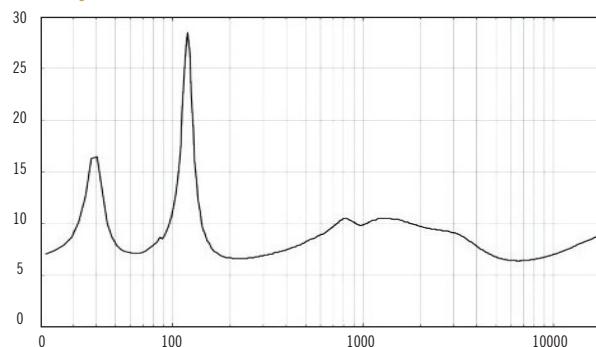

Frequency response from axis 1W/1m

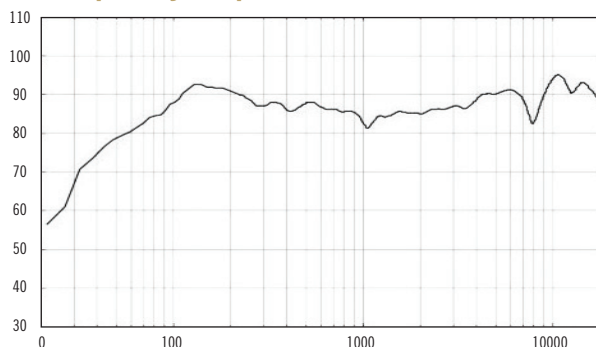

Technical data

Acoustical et electrical data

Continuous power RMS	40W
Power taps 70V	2,5W, 5W, 10W, 20W
100V	5W, 10W, 20W, 40W
Peak power	120W
Sensitivity	89dB / 1W / 1m
Frequency response (-3dB/-10dB)	85Hz - 20kHz / 50Hz - 20kHz
Impedance	8Ω
Coverage angle 1kHz / 4kHz	180° / 80°
Directivity index 1kHz / 4kHz	1,3 / 4,9

Mechanical data

Woofer	165mm (6,5In), fiber glass dome rubber surround
Twitter	25mm (1In), kapton dome, Coaxial and orientable
Crossover	3,5kHz 2nd order
Input	Push spring terminals
Visible diameter	280 mm
Hole cutout diameter	248 mm
Ceiling thickness	min 9 mm / max 37 mm
Backcan height	117,5 mm
Weight	2,9 kg
Standard colors	White RAL 9016

Tuning and exploitation

Environnement	IP23
Included accessories	Cut-out template, tools to remove and secure grille, adhesive logo